




Model No.	DM-80E	
DISPLAY	RED LED 20.32mm(0.8")	
ACCURACY	$\pm 0.5\% \pm 2$ digit	
TEMPERATURE RANGE	$-10^{\circ}\text{C} \sim +50^{\circ}\text{C}$	
DIELECTRIC STRENGTH	AC 2KV / 1 min.	
MEASUREMENT RANGE	DM-80E	
AMMETERS	AC	0~60A Direct Aux.power: AC 130~300V
	DC	0~30A Direct Aux.power: DC 2.5~30V
VOLTMETERS	AC	<ul style="list-style-type: none"> 130V~300V (under AC 130V can not display or display error) 70V~160V (under AC 70V can not display or display error)
	DC	<ul style="list-style-type: none"> 2.5V~30V (under DC 2.5V can not display or display error) 0~99.9V Aux.power DC 2.5~30V
FREQUENCY METERS	30HZ ~ 99.9HZ AC80V ~ 300V	

DIMENSIONS

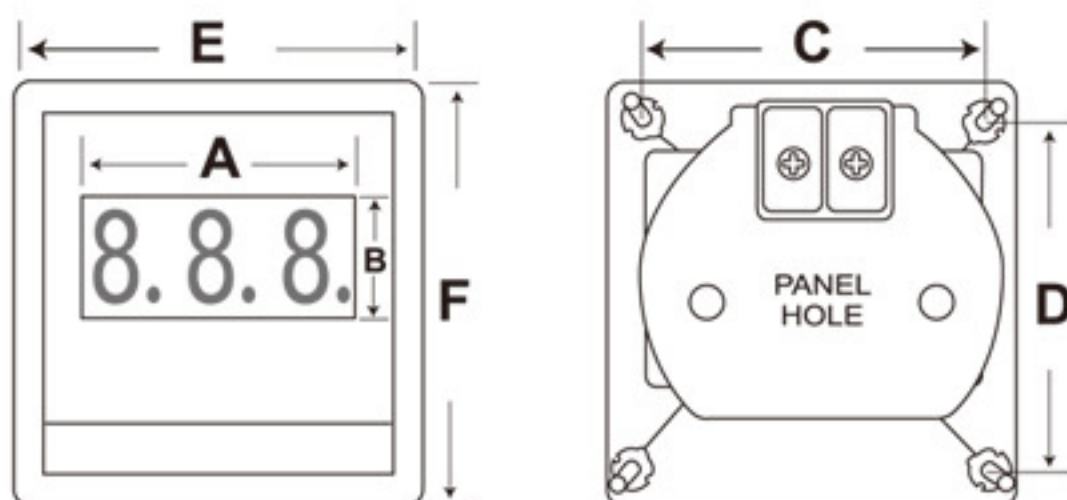

MODEL NO.	A	B	C	D	E	F	PANEL HOLE
DM-80E	59	25	65	65	80	80	65