

## LIMIT SWITCH


mm



Hinge short roller lever

### AZ 7141


Operating Force .....240 g max.  
Release Force .....80 g min.  
Pretravel .....6.5 mm max.  
Movement Differential...1.5 mm max.  
Overtravel .....2.0 mm min.  
Operating Position .....40 ± 1.6 mm

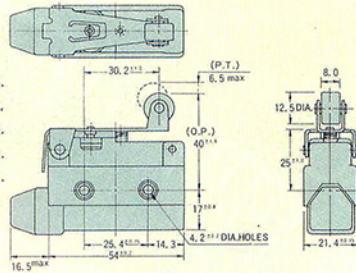

Overtravel plunger

### AZ 7110


Operating Force .....600 g max.  
Release Force .....100 g min.  
Pretravel .....2.0 mm max.  
Movement Differential...0.8 mm max.  
Overtravel .....5.0 mm min.  
Operating Position .....44 ± 1.2 mm

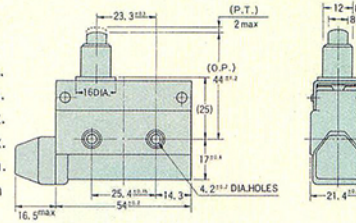

Panel mount plunger

### AZ 7310


Operating Force .....600 g max.  
Release Force .....100 g min.  
Pretravel .....2.0 mm max.  
Movement Differential...0.8 mm max.  
Overtravel .....6.0 mm min.  
Operating Position .....21.8 ± 0.8 mm

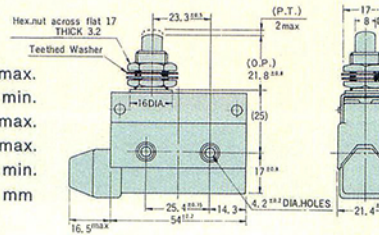

Panel mount roller plunger

### AZ 7311


Operating Force .....600 g max.  
Release Force .....100 g min.  
Pretravel .....2.0 mm max.  
Movement Differential...0.8 mm max.  
Overtravel .....6.0 mm min.  
Operating Position .....33.3 ± 1.2 mm

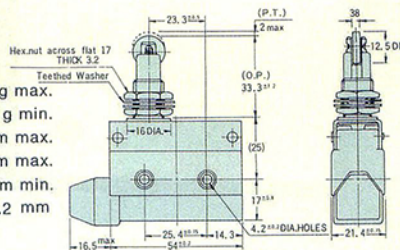

Compact overtravel plunger

### AZ 7100

Operating Force .....600 g max.  
Release Force .....100 g min.  
Pretravel .....2.0 mm max.  
Movement Differential...0.8 mm max.  
Overtravel .....0.8 mm min.  
Operating Position .....30 ± 0.8 mm

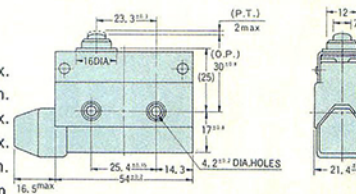

\* Epoxy-sealed terminal types

\*\* Neon lamp wired types

General tolerance: ±0.4